

Bourdon Tube Pressure Gauges

Bayonet Ring Case Stainless Steel

RCh 63
RChG 63

Standard Versions

Information on general and metrological features (load limits / temperature limitations) and standard pressure ranges / scale divisions can be found in model overview 1000.

Accuracy (EN 837-1)

Class 1.6

Class 2.5 for pressure ranges 0-600 and 0-1,000 bar
(0-10,000 and 0-15,000 psi)

Case

Bayonet ring, 1.4301 (304 stainless steel)

Case Protection Type (EN 60 529 / IEC 529)

IP 54,

IP 65 for model RChG with closed blow-out plug

Blow-out Device

Blow-out plug at the top of the case coverage

Case Ventilation

By blow-out plug, ventilation required for internal pressure compensation for pressure ranges ≤ 10 bar and also recommended for other pressure ranges, as far as the operating conditions allow this.

Case Filling

for model RChG: glycerine

Nominal Case Size

63 (mm) (2½")

Wetted Parts

Type -3: Connection: 1.4571 (316 stainless steel)

Bourdon tube: 1.4571 (316 stainless steel),
argon arc welding,
 ≤ 60 bar (800 psi) c-form,
 ≥ 100 bar (1,500 psi) helical

Type -1: Connection: brass

Bourdon tube: bronze,
 ≤ 40 bar (600 psi) soft-soldered, c-form,
 ≥ 60 bar (800 psi) silver brazed, helical

Case Configuration

Connection: screwed

Position of the connection: bottom connection,
optional lower back connection (**r**) /
centre back connection (**rm**)

Mounting device: without, optional back flange for
surface mounting (**Rh**) / front flange
for panel mounting (**Fr**), see page 2

Pressure Range (EN 837-1)

0-0.6 bar (0-10 psi) to 0-1,000 bar (0-15,000 psi) for type -3

0-0.6 bar (0-10 psi) to 0- 600 bar (0-10,000 psi) for type -1

Process Connection

G ¼ B (¼" BSP)

Window

Laminated safety glass for type -3

Instrument glass for type -1

Movement

Stainless steel for type -3

Brass/German silver for type -1

Dial

Aluminum, black figures, white background



Pointer

Aluminum, black

Safety Category according to EN 837-1

S1 pressure gauges with blow-out device

S2 safety pressure gauge,

proved: RCh 63-3 up to 1,000 bar (15,000 psi),

RChG 63-3 up to 600 bar (10,000 psi)

optional: Type -1, with laminated safety glass or polycarbonate

Ordering Information, Standard Pressure Ranges, Options:

see pages 3 and 4

Special Versions and further Options among others

- Special process connections, e. g. VCR-F VCR-M, VCR-M short (see technical information sheet T01-000-016) or cannula connection with needle for vacuum / pressure test for cans (see technical information sheet T01-000-022), others upon request
- Other pressure ranges and / or special scales, e.g. double scale bar/psi, coloured fields or areas, dial inscriptions, negative scale etc.
- Version as refrigeration gauge with temperature scale
- Case parts 1.4404 (316 L stainless steel) upon request
- Increased case protection type, e. g. IP 65 without case filling, upon request
- Welded case / connection for lower back connection or centre back connection upon request
- Other case fillings upon request
- Model RChG 63-3 bottom connection (lower back connection or centre back connection upon request) for ambient temperatures down to -40 °C (-40 °F). Our recommendation for ambient temperatures below -20 °C (-4 °F); pressure gauges with crimped-on ring case models RChg resp. RChgG
- Versions for medium temperatures up to 300 °C (572 °F), but without case filling upon request
- Position of connection radial at 3 o'clock, 9 o'clock or 12 o'clock (others upon request) or other than vertical installation (90°):
 - for models without case filling and for filled models with pressure equalizing membrane;
 - for filled models without pressure equalizing membrane upon request
- GOST-version for Russia, Ukraine, Kazakhstan
- Sour gas-resistant version according to NACE

Accessory:

Chemical seals: see catalogue-heading 7

Other accessory: see catalogue-heading 11

Case Configuration, Code Letters, Dimensional Data and Weights, Blow-out Device


Bottom connection

Lower back connection


Centre back connection

No mounting device


(no additional code letters)

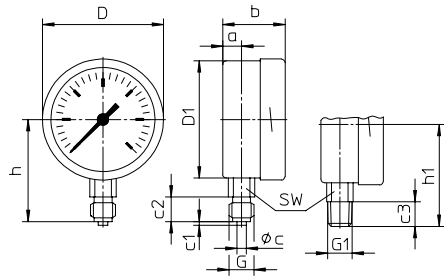

code letter: r

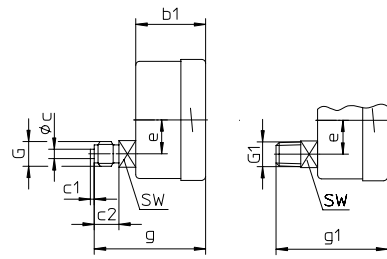


code letters: rm

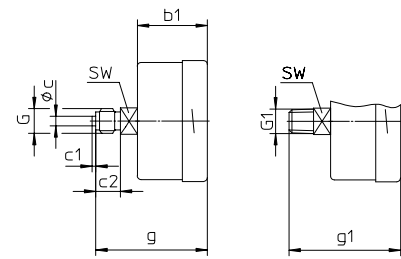


Back flange for surface mounting

code letters: Rh

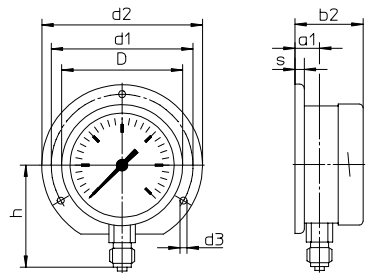


code letters: rRh



(available upon request, but according to EN 837-1 not recommended)


code letters: rmRh



(available upon request, but according to EN 837-1 not recommended)


Front flange for panel mounting

code letters: Fr

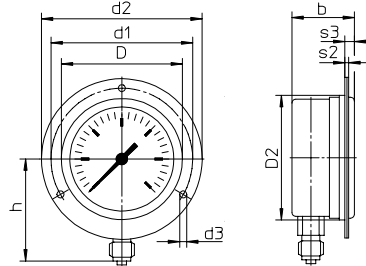


(available upon request, but according to EN 837-1 not recommended)

code letters: rFr



code letters: rmFr



Front flange for panel mounting with slotted holes, separate cover ring, recommended panel cut out: $\varnothing 67 \pm 0.3 \text{ mm}$ (0.01")

Dimensional data (mm / inches) and weights (kg / lb)


NCS	a	a1	b	b1	b2	b3	c	c1	c2	c3	D	D1	D2	d1	d2	d3	e	G	G1	g	g1	h ^{±1}	h1 ^{±1}
63	10	13	33	37	36	40	5	2	13	13	64	62	66	75	85	3.6	18	G 1/4 B	1/4" NPT	59	59	54	54
2 1/2"	.39	.51	1.3	1.46	1.42	1.57	.20	.08	.51	.51	2.52	2.44	2.60	2.95	3.35	.14	.71	1/4" BSP		2.32	2.32	2.13	2.13
																		M 12 x 1.5					

s	s2	s3	SW	approx. weight ¹⁾	RCh	RChG
5	2	5.5	14	0.180	0.250	
.20	.08	.22	.55	.400	.550	

¹⁾ Information for version without mounting device

Blow-out device


Blow-out plug 19



Optional:

Model RChG, case configuration bottom connection, r, rm:

Blow-out plug 24 (reclosable)



Ordering Information with Standard Pressure Ranges, Options

Basic Model:	Bourdon Tube Pressure Gauge, Bayonet Ring Case		RCh	
Case Filling:	without		without code letters	
	glycerine		G	
	fillable version		(G)	
Nominal Case Size:	case- Ø 63 (mm) (2½")		63	
Wetted Material:	copper alloy		-1	
	stainless steel		-3	
	Monel, 0-1 bar (15 psi) to 0-1,000 bar (15,000 psi), movement stainless steel, laminated safety glass, bourdon tube Monel argon arc welding, ≤ 60 bar (1,000 psi) c-form, ≥ 100 bar (1,500 psi) helical, bottom connection, optional r (no rm), safety version S2 up to 0-600 bar (10,000 psi)		-6	
Case Configuration:	case / connection	screwed	without code letters	
		welded (only type -3, bottom connection)	v	
	position of the connection:	bottom connection		without code letters
		lower back connection		r
		centre back connection		rm
mounting device:	without		without code letters	
	back flange for surface mounting		Rh	
	front flange for panel mounting		Fr	
Pressure Ranges:	-1,200 – 0 mbar	30" Hg vac. – 0		
	-0.6 – 0 bar			
	-1 – 0 bar			
	-1 – 0.6 bar	30" Hg vac. – 15 psi		
	-1 – 1.5 bar	30" Hg vac. – 30 psi		
	-1 – 3 bar	30" Hg vac. – 60 psi		
	-1 – 5 bar	30" Hg vac. – 100 psi		
	-1 – 9 bar	30" Hg vac. – 160 psi		
	-1 – 15 bar	30" Hg vac. – 200 psi		
		30" Hg vac. – 300 psi		
	0 – 0.6 bar	0 – 10 psi		
	0 – 1 bar	0 – 15 psi		
	0 – 1.6 bar			
	0 – 2.5 bar	0 – 30 psi		
	0 – 4 bar	0 – 60 psi		
	0 – 6 bar	0 – 100 psi	e. g. 0-6 bar	
	0 – 10 bar	0 – 160 psi		
	0 – 16 bar	0 – 200 psi		
	0 – 25 bar	0 – 300 psi		
	0 – 40 bar	0 – 600 psi		
	0 – 60 bar	0 – 800 psi		
		0 – 1,000 psi		
	0 – 100 bar	0 – 1,500 psi		
	0 – 160 bar	0 – 2,000 psi		
	0 – 250 bar	0 – 3,000 psi		
		0 – 4,000 psi		
	0 – 400 bar	0 – 5,000 psi		
	0 – 6,000 psi			
0 – 600 bar	0 – 10,000 psi			
0 – 1000 bar for type -3	0 – 15,000 psi			
Process Connection:	standard thread	G ¼ B (¼"BSP)	G ¼" B	
	options:	¼" NPT	¼" NPT	
		M 12 x 1.5	M 12 x 1,5	
		G ⅜ B (⅜"BSP)	G ⅜" B	
	⅜" NPT	⅜" NPT		
Options:	see page 4			
Example:	RCh 63-3 rmFr, 0-6 bar, G ¼ B			

Further Options regarding Ordering Information

Basic Model:	Bourdon Tube Pressure Gauge, Bayonet Ring Case		RCh
Model Code:			see page 3
Options:	adjustable pointer		<i>(order at the moment still as cleartext)</i>
	red mark	on the dial	
	stationary red pointer	on the dial adjustable when removable ring	
	stationary red pointer	integrated into polycarbonate window adjustable externally	
		removable key non-removable key	
	min.- or max.- drag indicator	intergrated into polycarbonate window adjustable externally	
	2.5 bar (30 psi) and above		
		removable key non-removable key	
	receiver gauge 0.2-1 bar, scale 0-100%		
		linear square	
	special adjustment (reference points = odd values, e. g. 100 KN = 8.735 bar)		
	window	laminated safety glass for type –1 (= S2 see below) acrylic glass (PMMA) ¹⁾ polycarbonate (PC) (= S2 see below)	
	movement	stainless steel for type –1 (for –3 and –6 standard)	
	pressure equalizing membrane for model RChG with blow-out device		
	Ø 1" (25 mm) in the back of the case when bottom and lower connection		
	blow-out plug 24 (reclosable)		
	case ventilation no. 22 for outdoor installation		
	case polished		
	bayonet ring polished		
	density examination	with helium leak detection up to of the measuring unit 10 ⁻⁹ mbar l/s for types –3 and –6	
	wetted parts, free of grease and oil, to 0-600 bar (0-10,000 psi)	adjustment ≤ 250 bar (3,000 psi) with dry air, ≥ 400 bar (5,000 psi) with distilled water, dial marking: symbol cancelled oil can	
	oxygen version up to 0-600 bar ²⁾ (0-10,000 psi)	free of grease and oil, additional restrictor screw in the inlet port, orifice Ø 0.3 mm (0.01"), dial inscription: oxygen EN 837-1 in connection with oxygen version requires safety category S2 ³⁾ or S3	
	silicone-free version:	dial marking: symbol	
	German Lloyd or Russian Sea Register		
	RChG 63	copy of the certificate upon request	
	safety category S2	for version –1 up to 0-600 bar (0-10,000 psi), window made of laminated safety glass or polycarbonate (PC)	
	restrictor screw in pressure inlet port	orifice Ø 0.8 mm (0.03") orifice Ø 0.6 mm (0.02") (not Monel)	
	material: as process connection brass, stainless steel or Monel	orifice Ø 0.3 mm (0.01") (not Monel)	
	measuring point marking	stainless steel-plate 12 mm x 55 mm (0.47" x 2.17"), wire mounting or sticker on case coverage	

Special versions: Please describe your requirements clearly

¹⁾ not for S2
²⁾ for instruments without case filling

³⁾ see "safety category" page 1